



ROLL-IN RACK CONVECTION OVEN



Signature Rotating Rack Oven, Gas or Electric, (2) Single Rack Capacity, (1) Double Rack Capacity, Side Loaded, Touchscreen Control, Advanced Programmable Controls, 8 Stage Baking, 99 Recipes, Front Mounted Panel, Standard Type II Hood, Variable Air Speed, Adjustable Air Flow, Reversible Door, Shot or Pulse Steam Injection, Stainless Steel Construction, NSF Certified



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **SRO2E , SRO2G**



FEATURES

- ☐ Advanced Programmable Touchscreen Control
 - 99 Programmable Recipes
 - 8 Stage Baking
- ☐ Standard Type II Hood
- ☐ Digital Temperature Control up to 525°F (273°C)
- ☐ Rotating Rack System for Even Baking (1500 lb. capacity)
- ☐ Shot & Pulse Steam Capabilities
- ☐ Efficient Electric or Gas Heating
- ☐ Energy Saving Mode
- ☐ Advanced Moisture Evacuation System

CONSTRUCTION

- ☐ Stainless Steel Construction
- ☐ Field Reversible Door
- ☐ Ships Knockdown or One Piece Standard
- ☐ Self Adjusting Slip Clutch on Rack
- ☐ Built in Rollers Allow for Easy Movement and Installation
- ☐ Four Adjustable Air Channels Designed for Perfect Bakes

OPTIONS & ACCESSORIES


- ☐ Prison Package
- ☐ Roll-In Racks (# of Shelves: 8, 10, 12, 15 & 20)
- ☐ Water Filter

CLEARANCES

- ☐ 0" (0 mm) Side & Back
- ☐ 0" (0 mm) Bottom
- ☐ 36" (305 mm) Top

WARRANTY

- ☐ One Year Labor & Two Year Parts

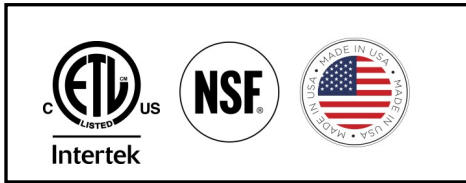

Model	Crated Weight	Overall Dimensions			Interior Dimensions		
		W	D	H	W	D	H
SRO2E	1650	43 5/8"	53 3/8"	77 1/2"	40"	53"	73 1/2"
	(749)	(1108)	(1356)	(1985)	(1016)	(1346)	(1867)
SRO2G	1650	43 5/8"	53 3/8"	77 1/2"	40"	53"	73 1/2"
	(749)	(1108)	(1356)	(1985)	(1016)	(1346)	(1867)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION A | 4/21/2021

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca







PROJECT _____
ITEM NO. _____
NOTES _____
MODEL NUMBER: **SRO2E , SRO2G**

DRAWINGS

SRO2E

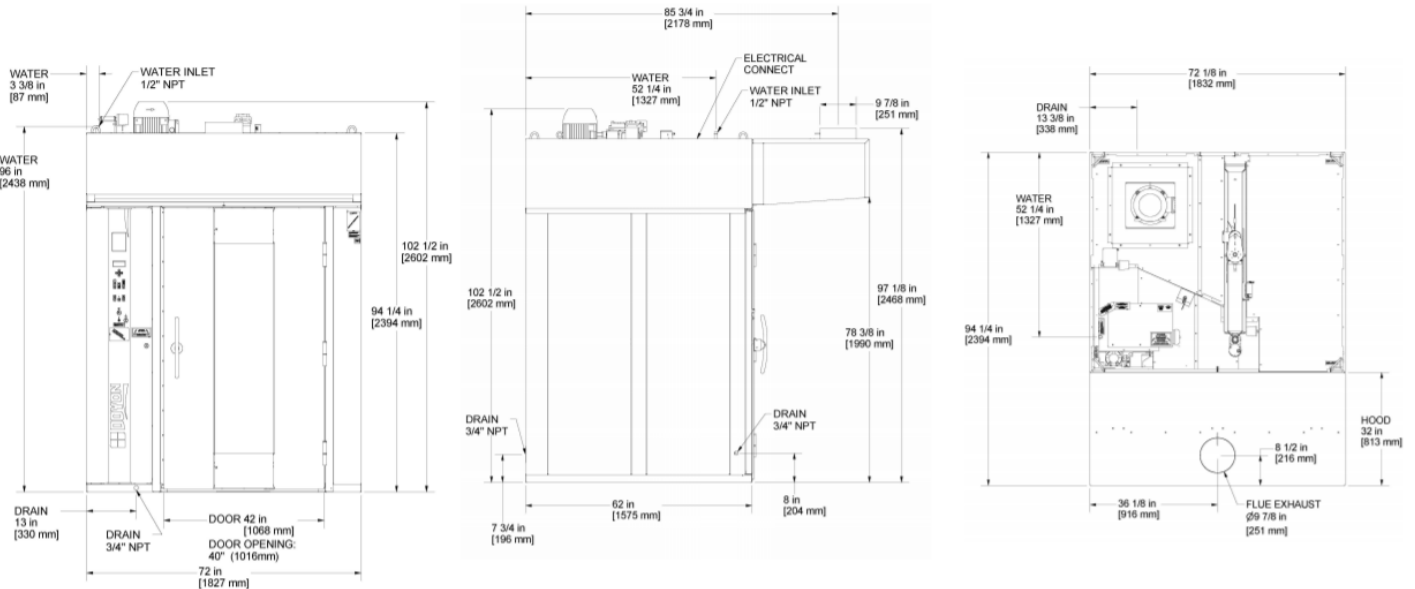

SRO2G

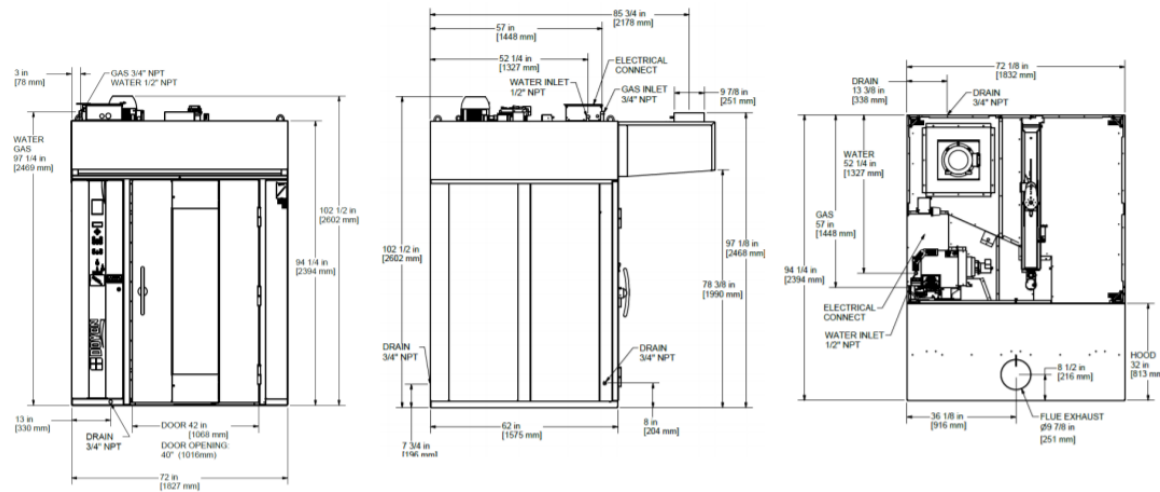

Model	Gas System			Water Inlet	Electrical System *ground wire not included					
	BTU	D.H.	G.I.		Volts	Phases	Amps	kW	Wires*	Hz
SRO2E	-	-	-	1/2" (12)	208	3	142	51	3	60
					240	3	123	51		60
					480	3	61	51		60
SRO2G	275,000	-	-	1/2" (12)	208/240	1	12/12	4	2	50/60
					208/240	3	10/10	4	3	50/60

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION A | 4/21/2021

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca

